

LNB

LNB REDUNDANT SWITCH SYSTEM


Applications

Norsat's Redundant LNB Switch System features a slim, streamline outdoor unit mounted on a plate for easy installation. Automatically detect signal faults and switch to an alternate LNB - providing maximum satellite service availability. Receive-side signal continuity is maintained via continuous power detection, and upon detecting a fault, signal is automatically switched to the reserve LNB. Available for either 1:1 or 1:2 redundancy applications, Norsat LNB Redundant Switch solutions combine the reliability and performance of down conversion products with the ultimate system safeguarding solution for remote and challenging satellite terminal installations.


FEATURES

- C, Ku and Ka-band Systems available
- Automatically detect LNB failure via DC current
- Fully automatic or manually-commanded redundancy
- M&C through Ethernet (SNMP, Web Interface)
- Custom requirement available
- Optional 1U-19" Indoor Unit

RS-LNB

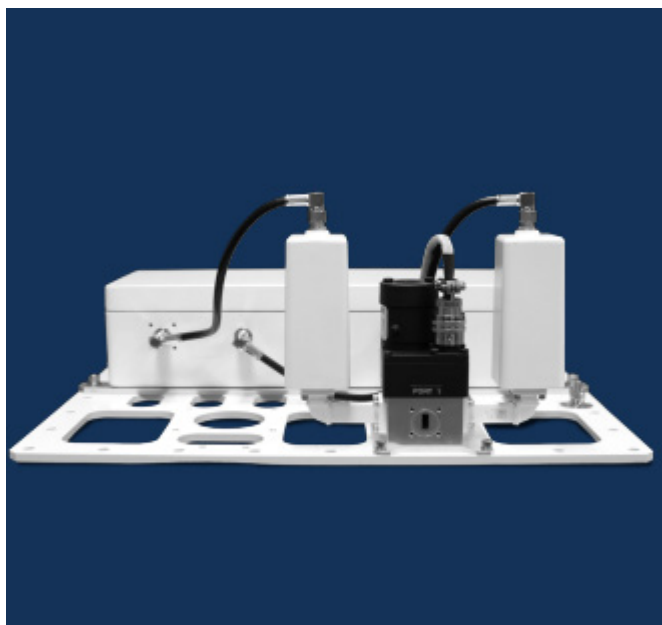

MECHANICAL DIAGRAM

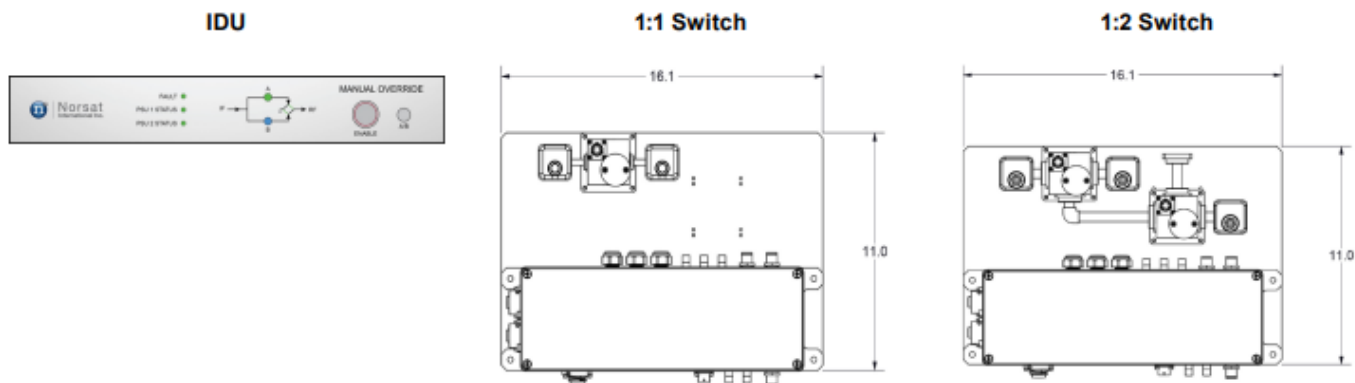



Norsat
International Inc.

LNB


LNB REDUNDANT SWITCH SYSTEM

SPECIFICATIONS

SYSTEM		MECHANICAL	
Insertion Loss	0.5 dB max.	Weight	11 lbs (5 kg) max. (excluding installed devices)
Output VSWR	1.1 Maximum	Dimensions (L x W x H)	19 in x 12.25 in x 10.1 in (483 mm x 311 mm x 257 mm)
Switchover Time	Ku-Band/Ka-Band: 100ms max. C-Band: 150ms max.	Packaging	26 in x 23 in x 27 in (661 mm x 584 mm x 686 mm)
Power	90-250VAC (50-60 Hz) or 24VDC	Input	Ku-Band - WR-75 Ka-Band - WR-42 C-Band - WR-229
ENVIRONMENTAL			
Operating Temperature	-40 to +60°C		
Survival Temperature	-45 to +75°C		
Relative Humidity	<100%		
Waterproofing	IP66		

HOW TO ORDER

RSLNB KU 11 N

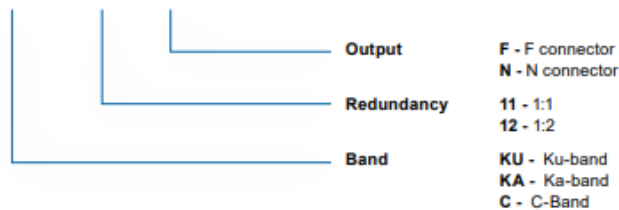

LNB OPTIONS

Ku-Band	1000H or HS1000 Series
Ka-Band	9000 Series
C-Band	3000 Series

OPTIONAL CONFIGURATION ADD-ONS

RS-MT	Boom Mount		
RS-INT	Integrated before shipping		
RS-IDU	Optional 1U-19" Indoor Unit with LED display		
RS-FILTER	Transmit reject filter for LNB Redundancy Switch		
IFL Cable (1:1 Redundancy)	30m	50m	100m
	RS-IFL-30F	RS-IFL-50F	RS-IFL-100F
	RS-IFL-30N	RS-IFL-50N	RS-IFL-100N
IFL Cable (1:2 Redundancy)	30m	50m	100m
	RS-IFL-30F-2	RS-IFL-50F-2	RS-IFL-100F-2
	RS-IFL-30N-2	RS-IFL-50N-2	RS-IFL-100N-2